


1 / 32


FIG. 1

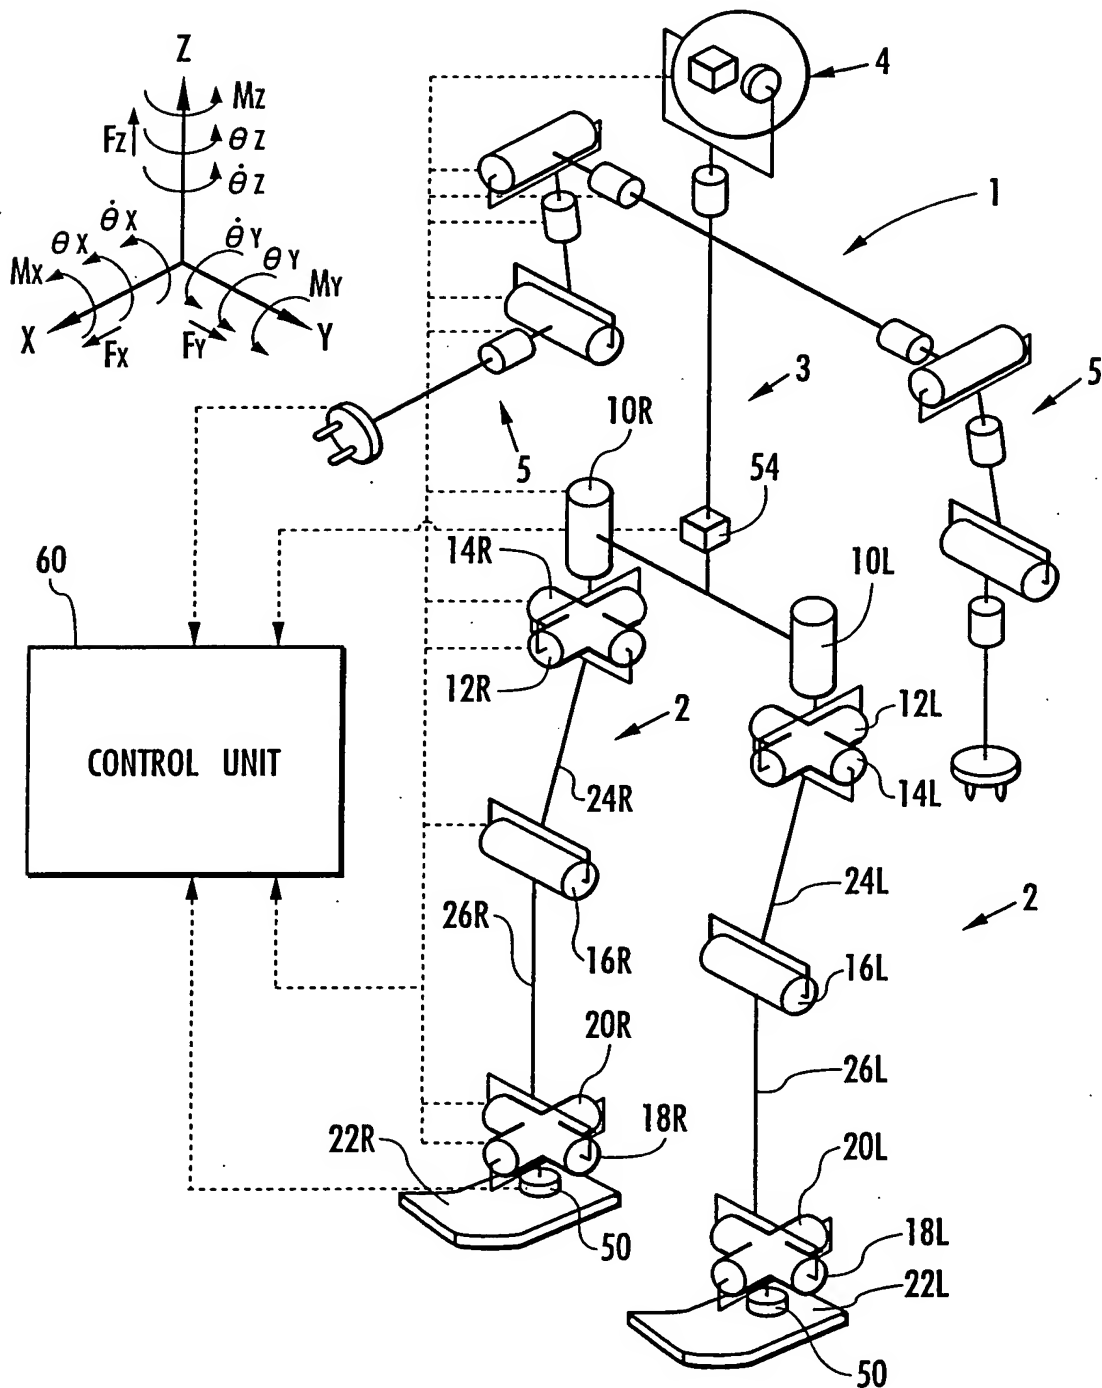

10/511360

2 / 32

FIG. 2

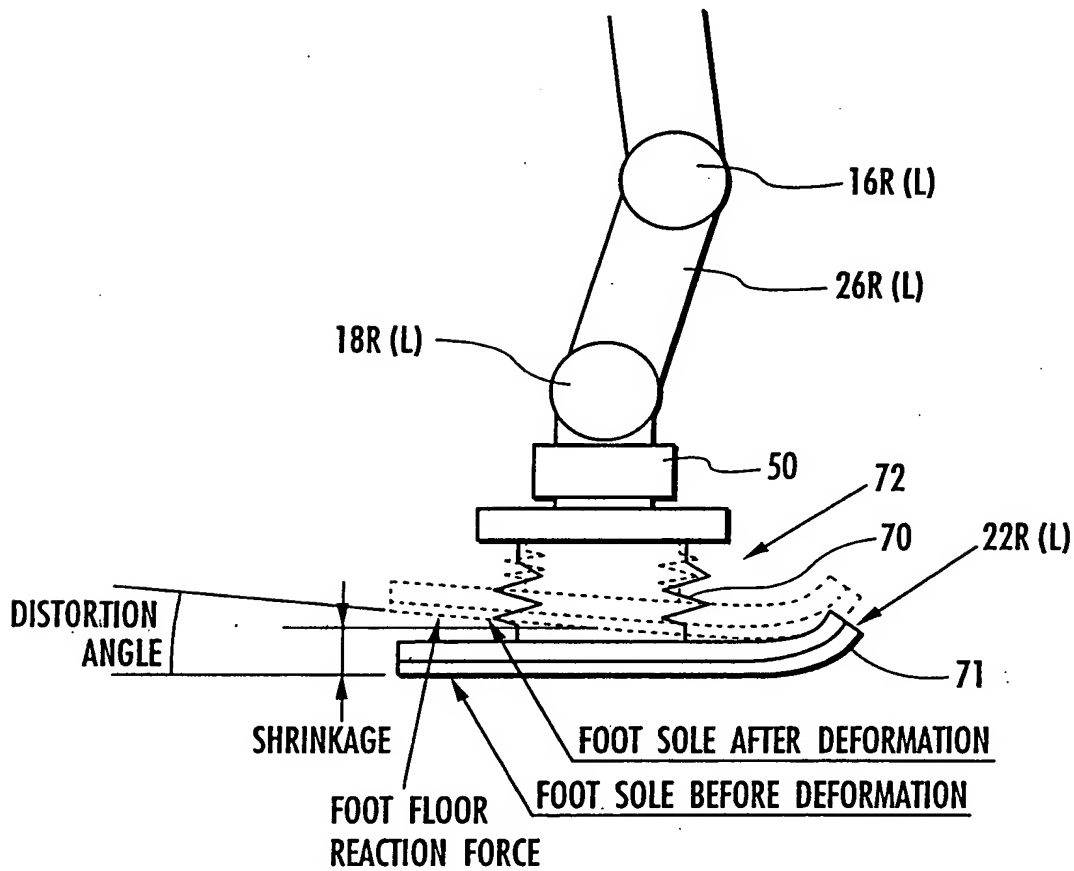

10/511360

3 / 32

FIG. 3


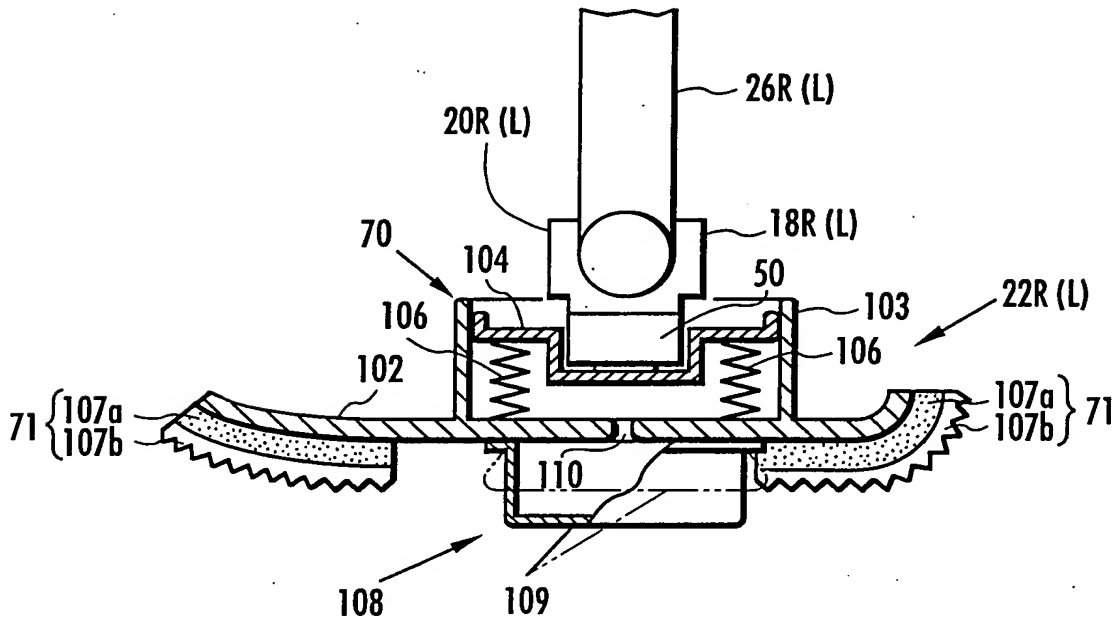



FIG. 4

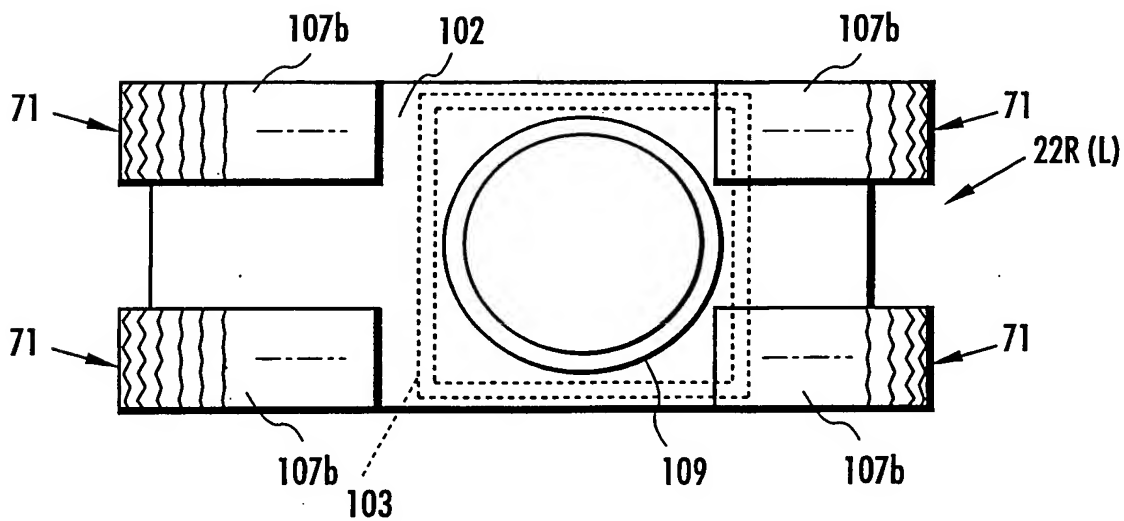

10/511360


4/32

FIG. 5

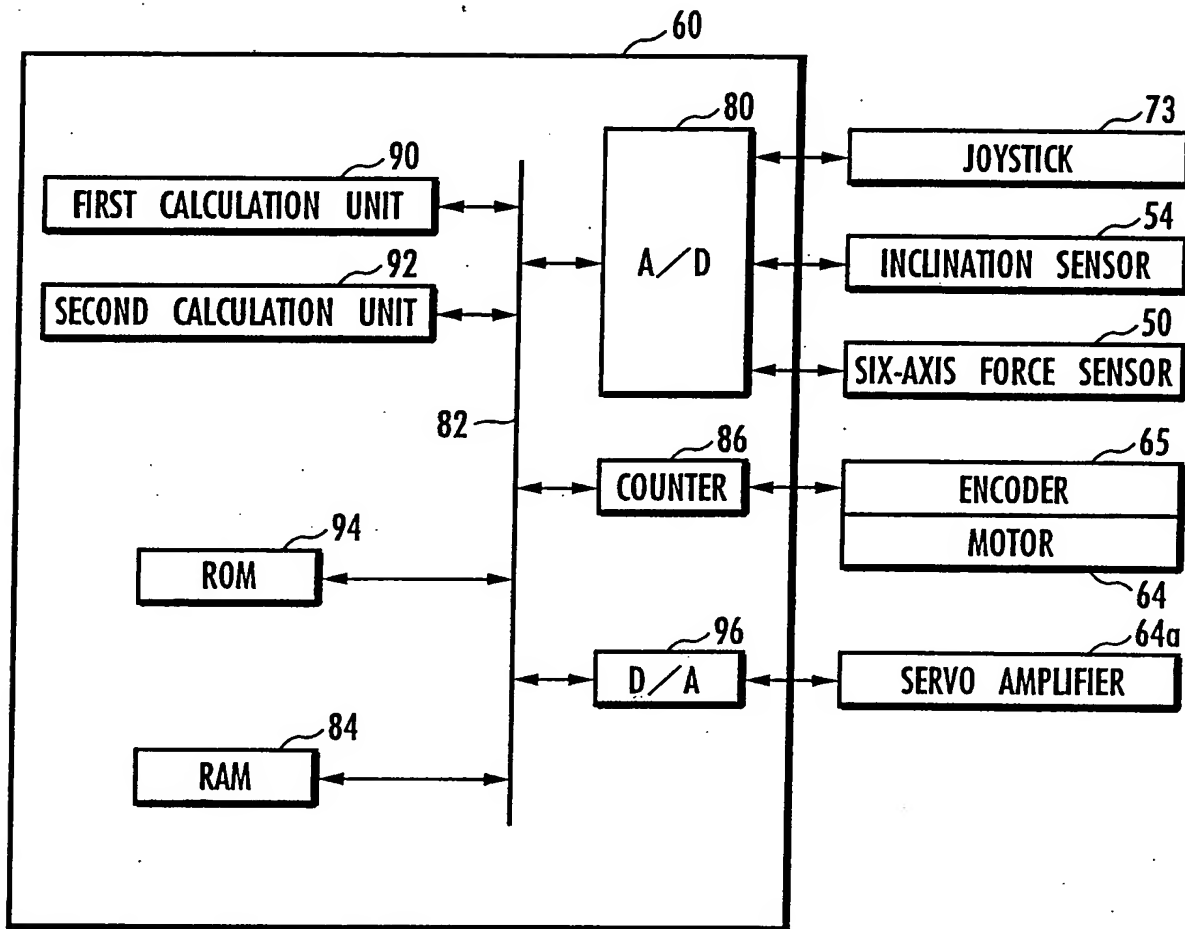

10/511360


FIG. 6

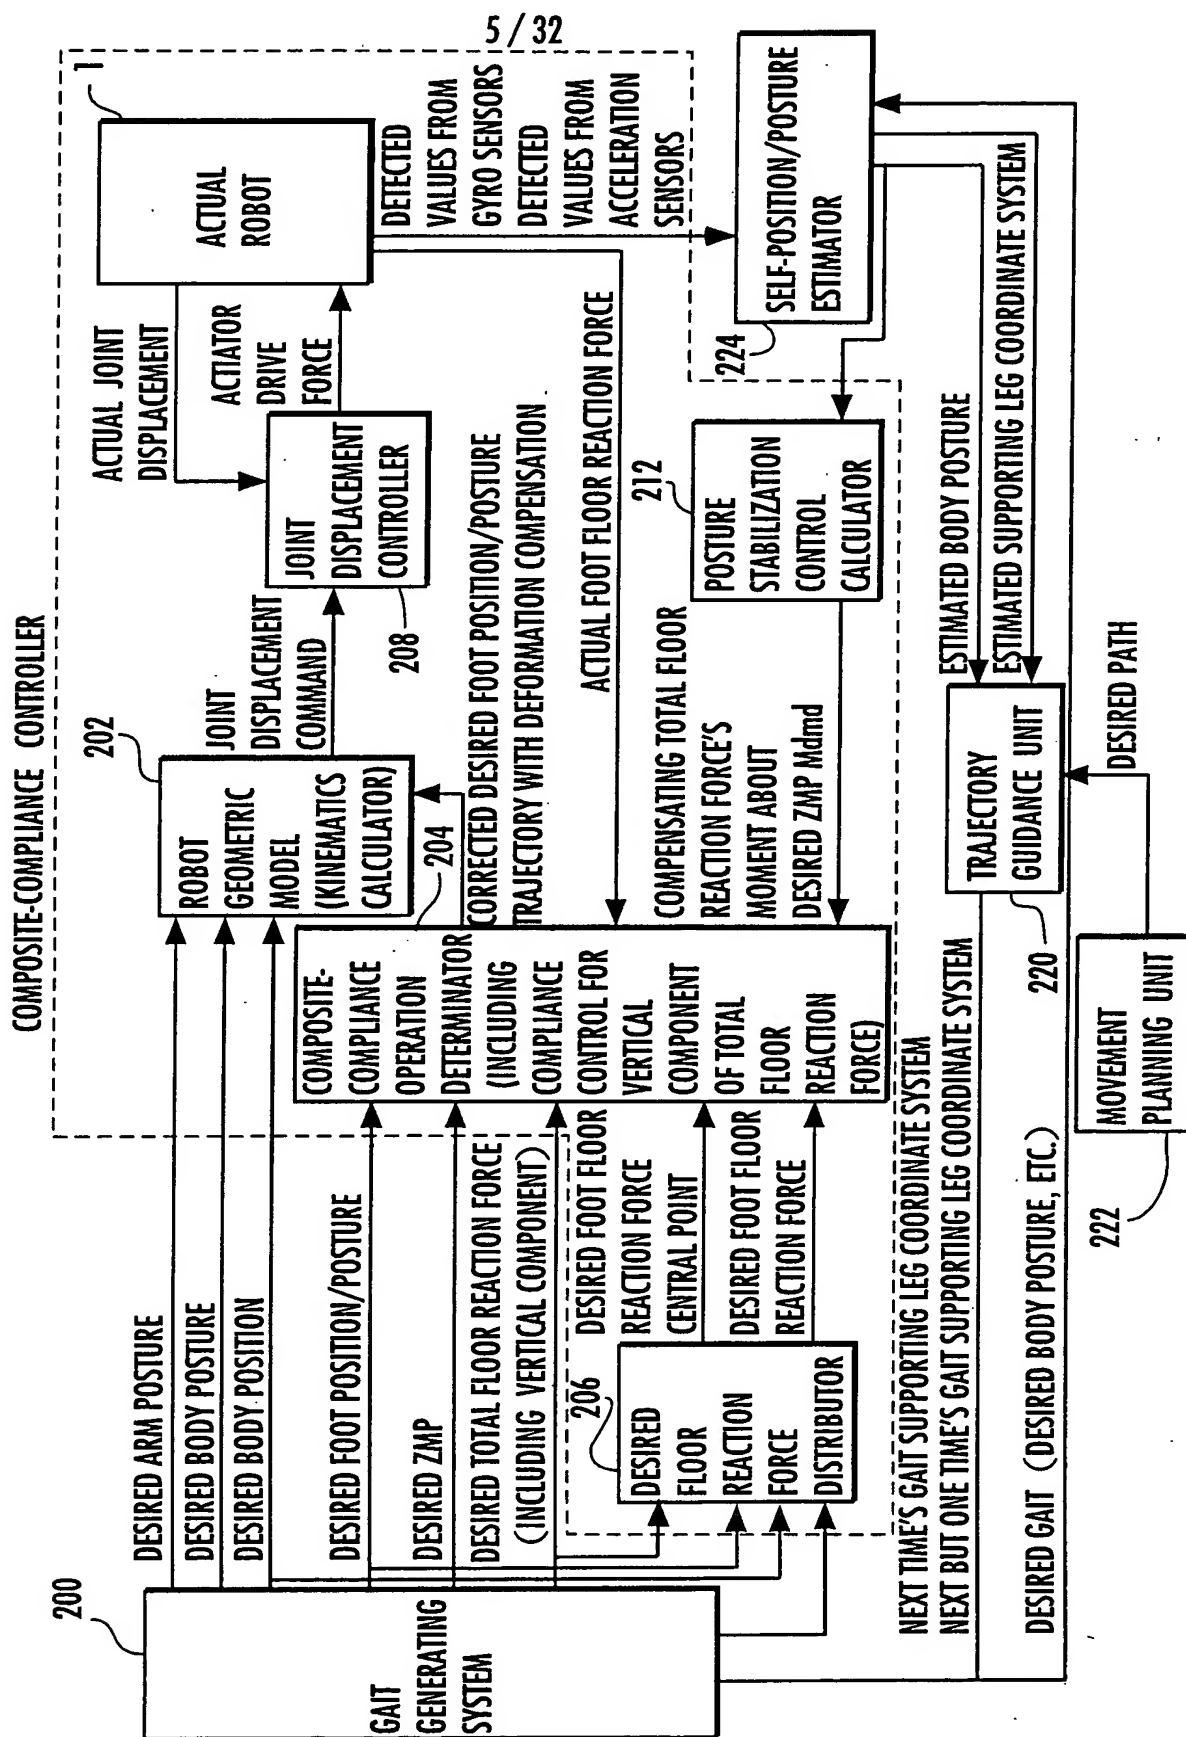

10/511360

6/32

FIG. 7

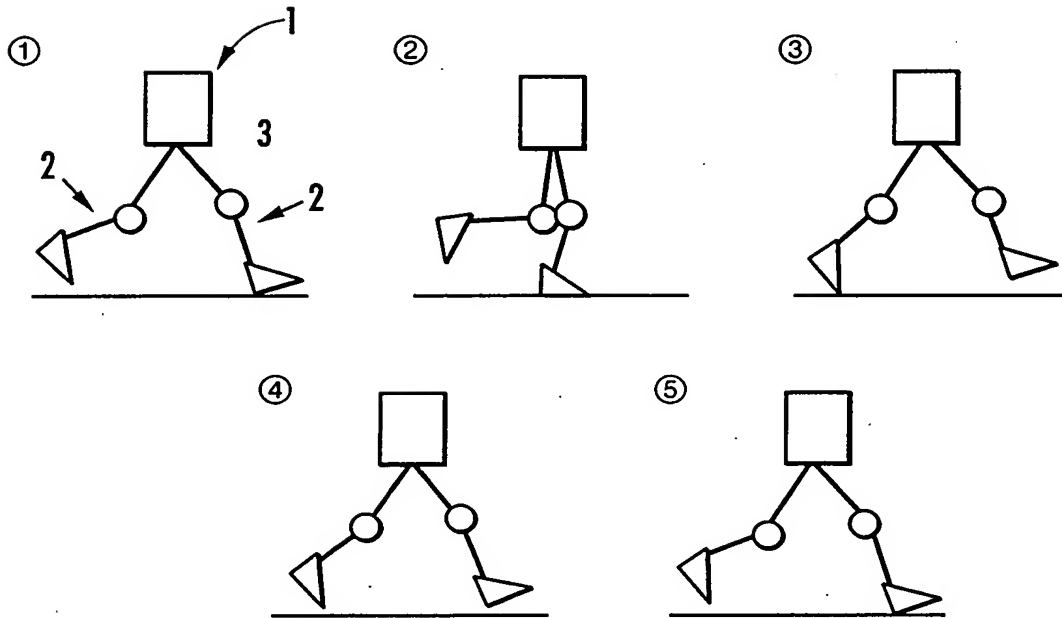

10/511360

7 / 32

FIG. 8 (a)



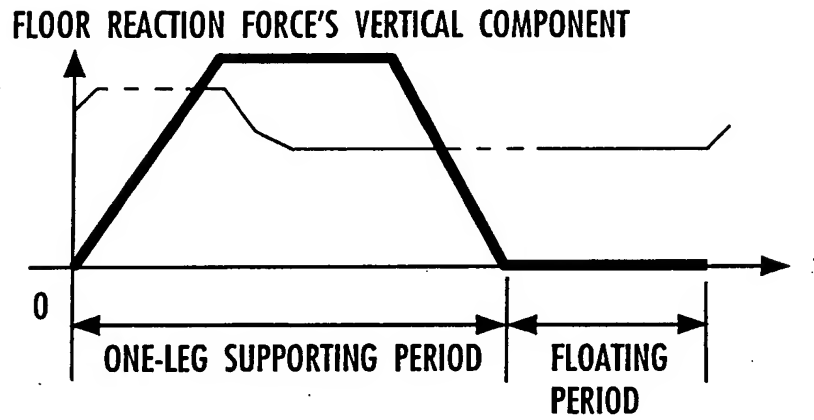


FIG. 8 (b)

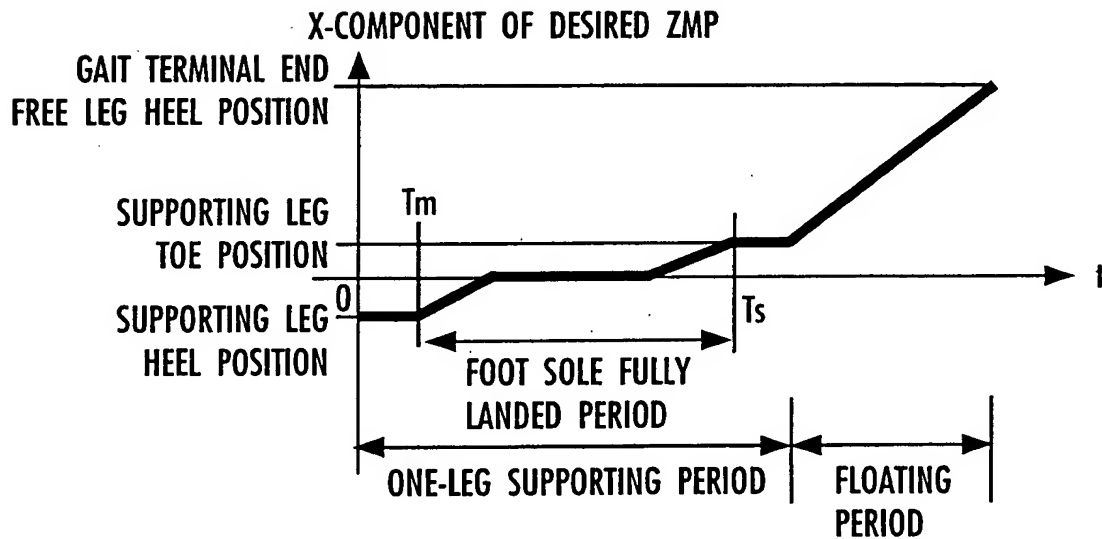

8 / 32

FIG. 9

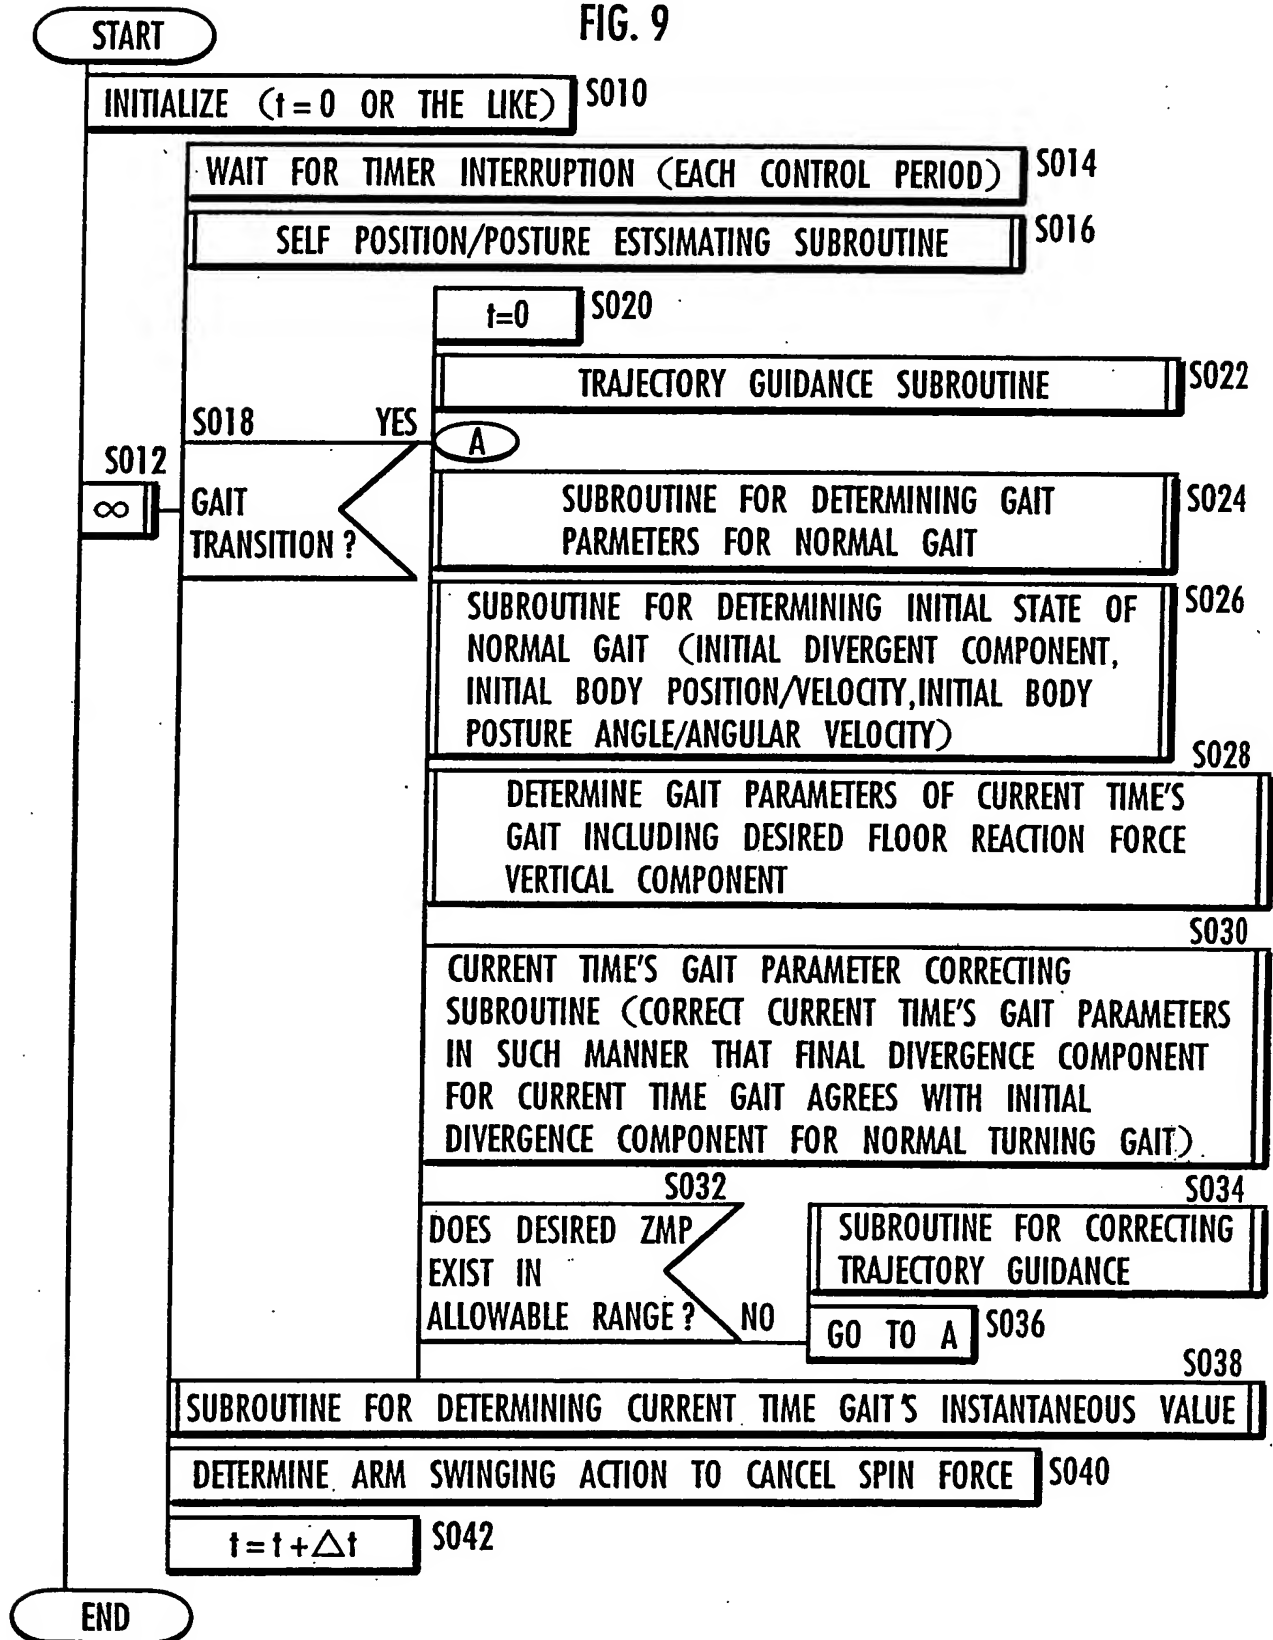




10/511360

9/32

FIG. 10

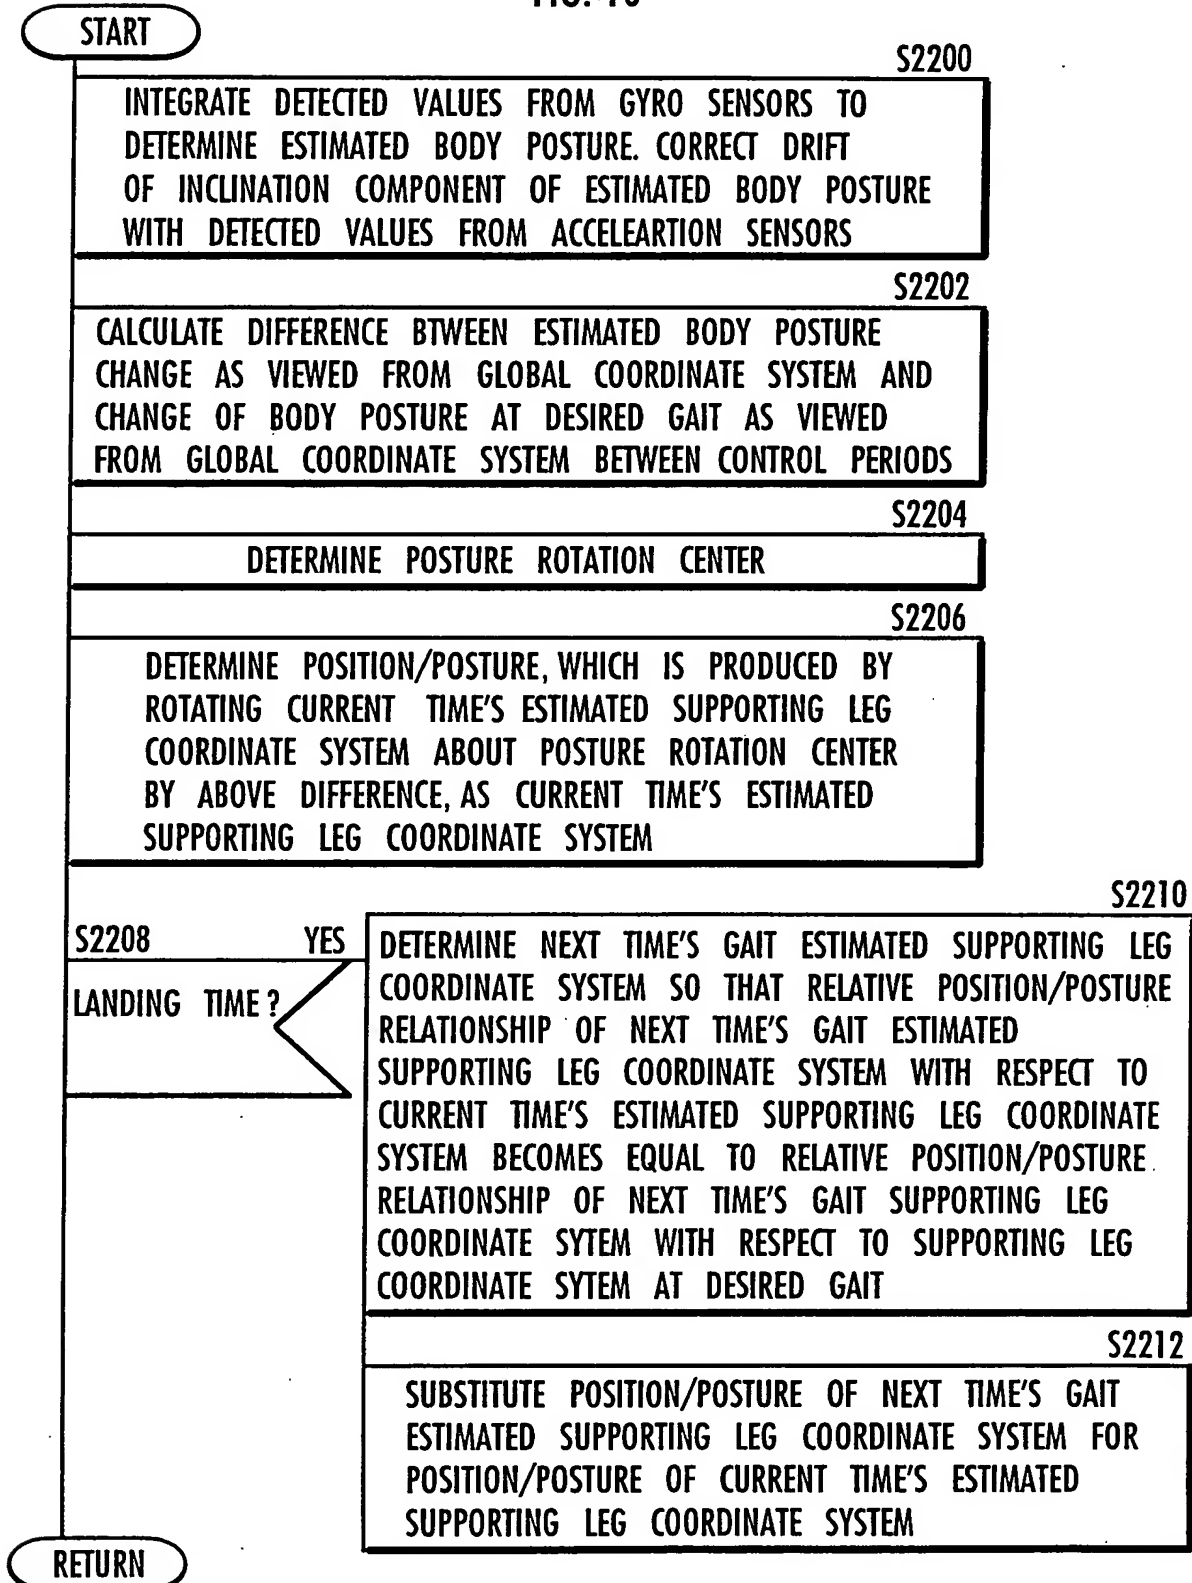

10/511360

10/32

FIG. 11


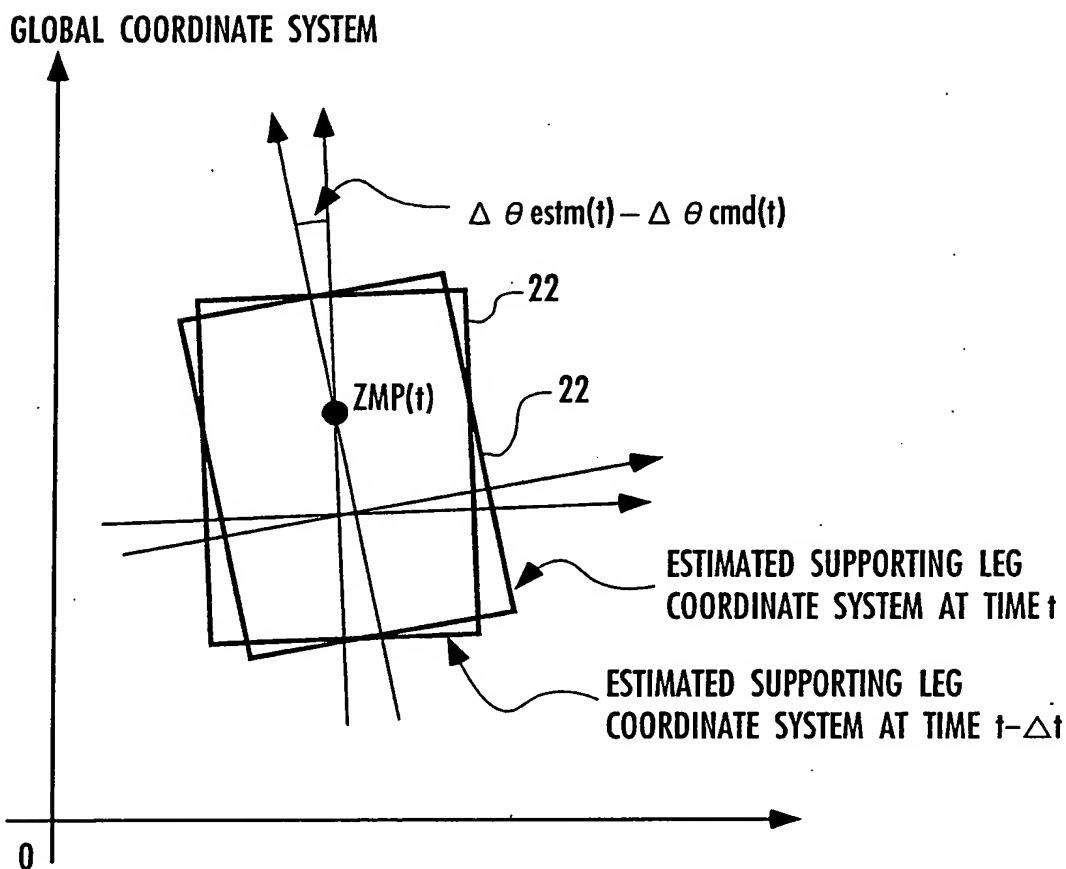


FIG. 12

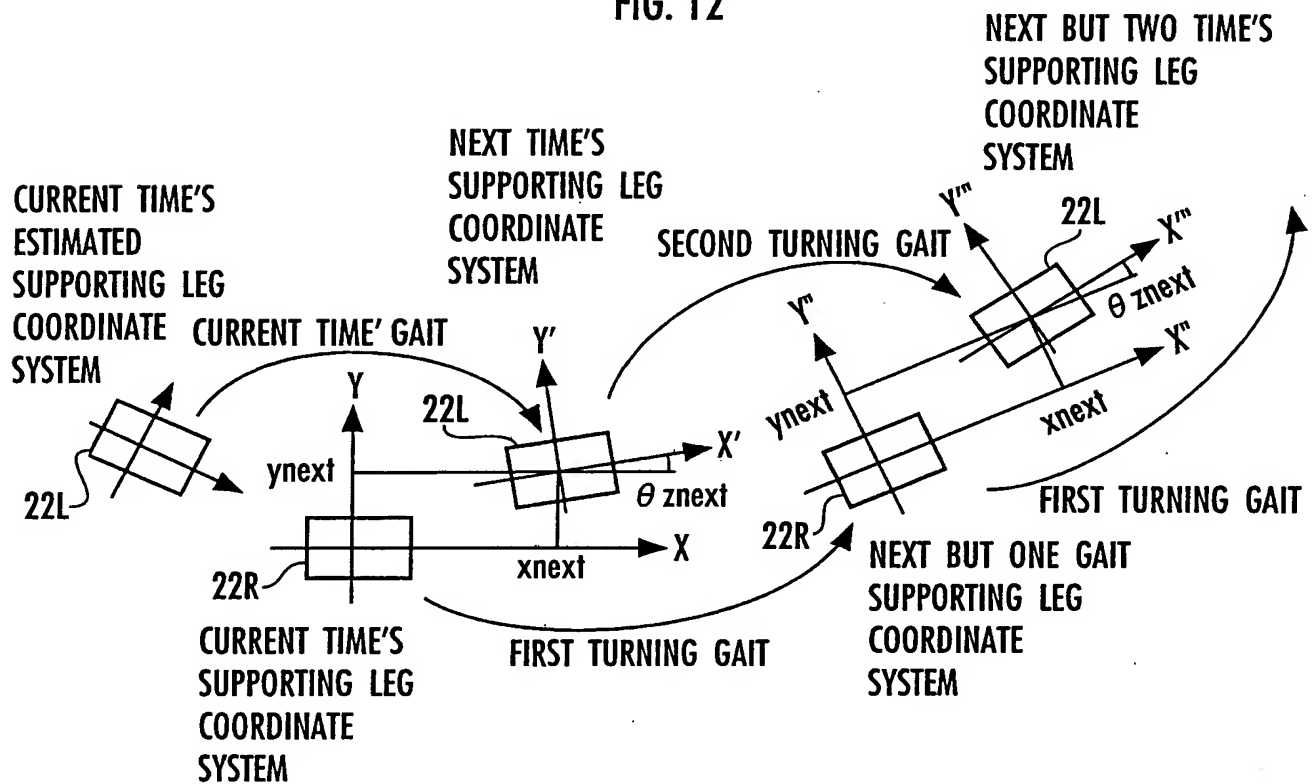

10/511360

12/32

FIG. 13

ENTRY

S3000

DETERMINE CURRENT TIME'S SHORT-TERM DESIRED POINT Q (0) BASED ON REPRESENTATIVE POINT P (0) OF ESTIMATED SUPPORTING LEG COORDINATE SYSTEM AND DESIRED PATH

S3002

DETERMINE REPRESENTATIVE CANDIDATE POINT R (0) OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM ON LINE SEGMENT P (0) Q (0)

S3004

DETERMINE POINT CLOSEST TO REPRESENTATIVE CANDIDATE POINT R (0) IN ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE) , AS P (1)

S3006

DETERMINE POSITION AND ORIENTATION OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS P (1) AND DIRECTION OF X-AXIS OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE SEGMENT P (0) Q (0)

S3008

DETERMINE NEXT TIME'S SHORT-TERM DESIRED POINT Q (1) BASED ON REPRESENTATIVE POINT P (1) OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM AND DESIRED PATH

S3010

DETERMINE REPRESENTATIVE CANDIDATE POINT R (1) OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM ON LINE SEGMENT P (1) Q (1)

S3012

DETERMINE POINT CLOSEST TO REPRESENTATIVE CANDIDATE POINT R (1) IN ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE) , AS P (2)

S3014

DETERMINE POSITION AND ORIENTATION OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS P (2) AND DIRECTION OF X-AXIS OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE SEGMENT P (1) Q (1)

RETURN

10/511360

13 / 32

FIG. 14


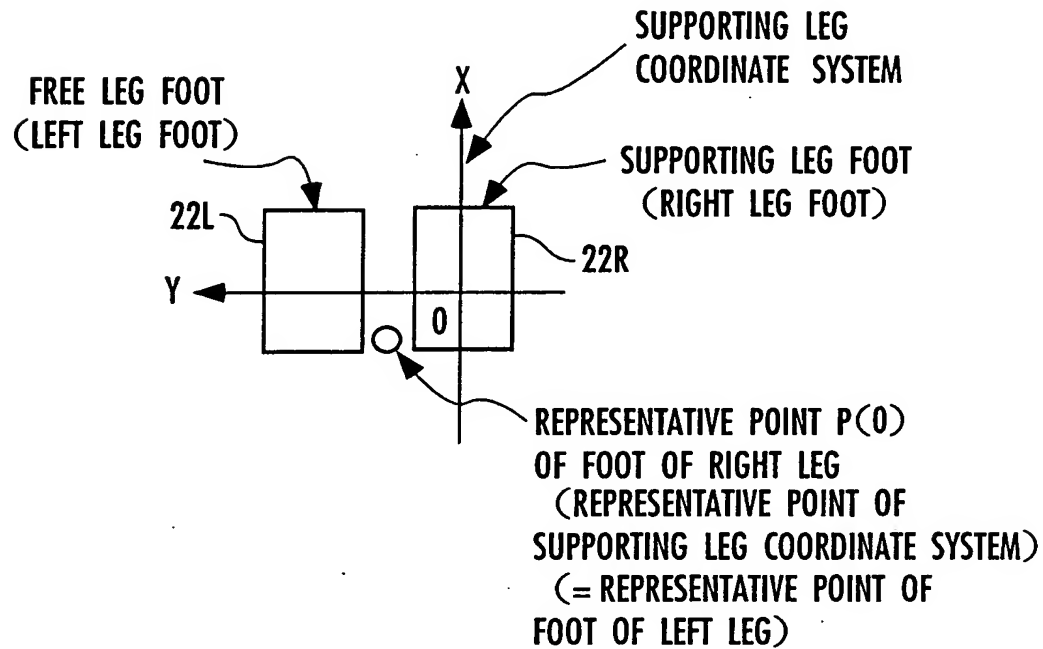


FIG. 15

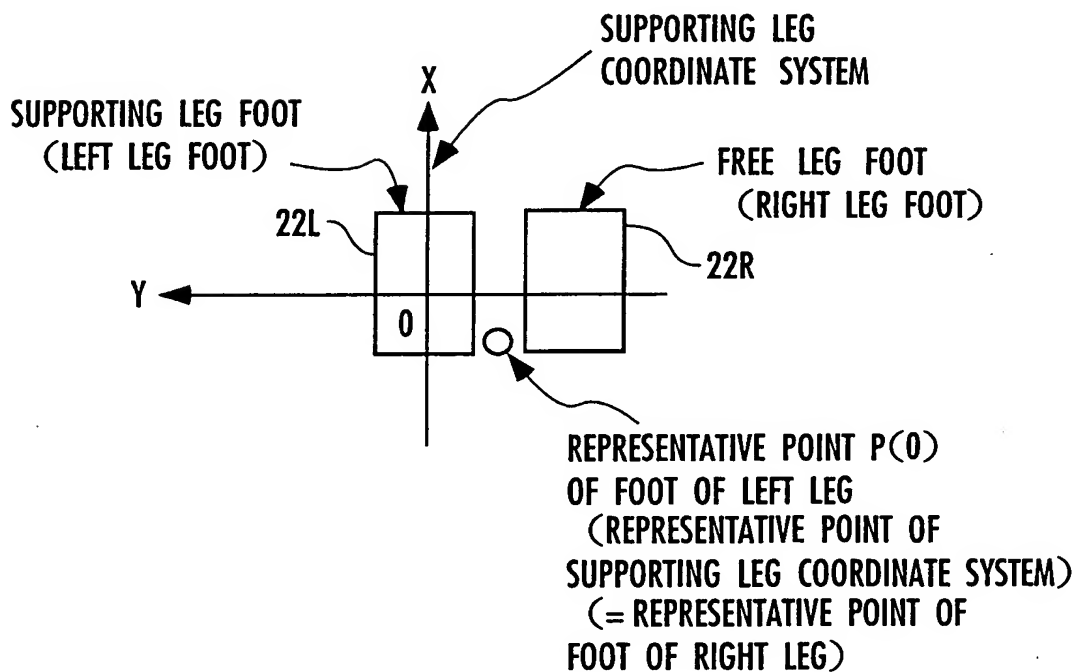

10/511360

14 / 32

FIG. 16


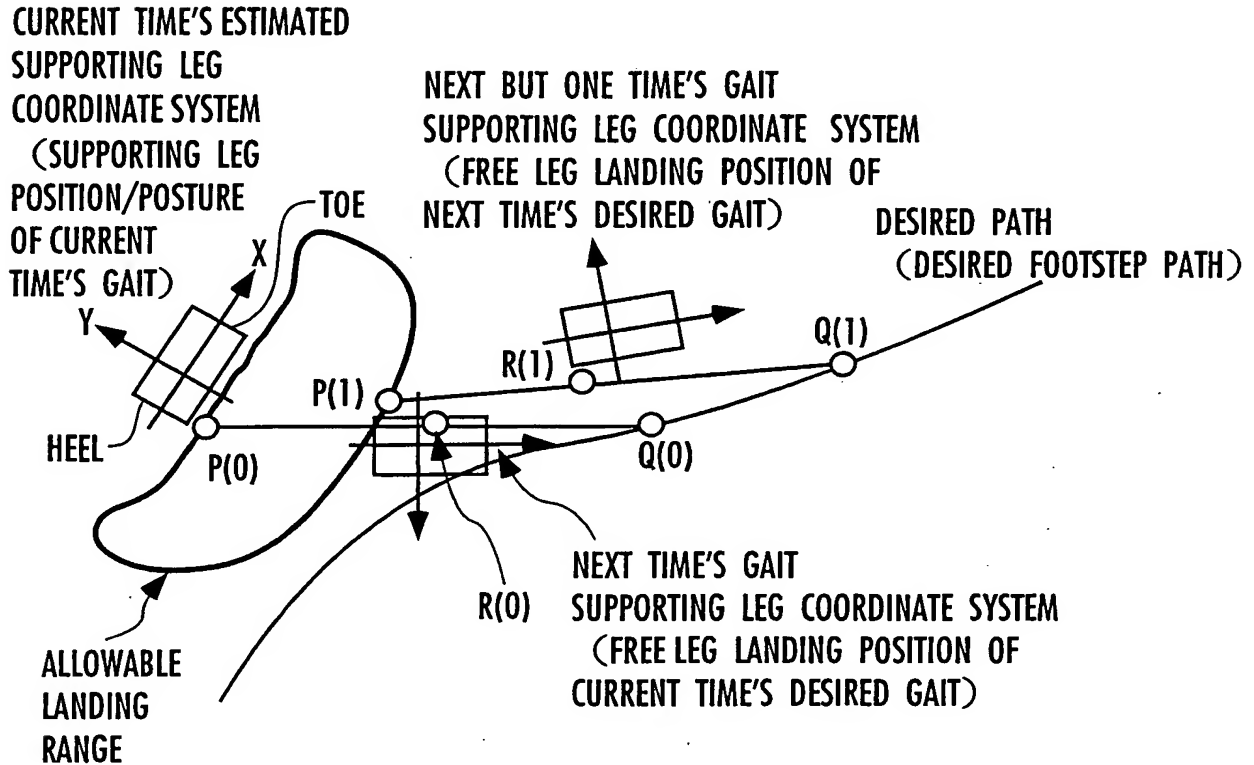


FIG. 17

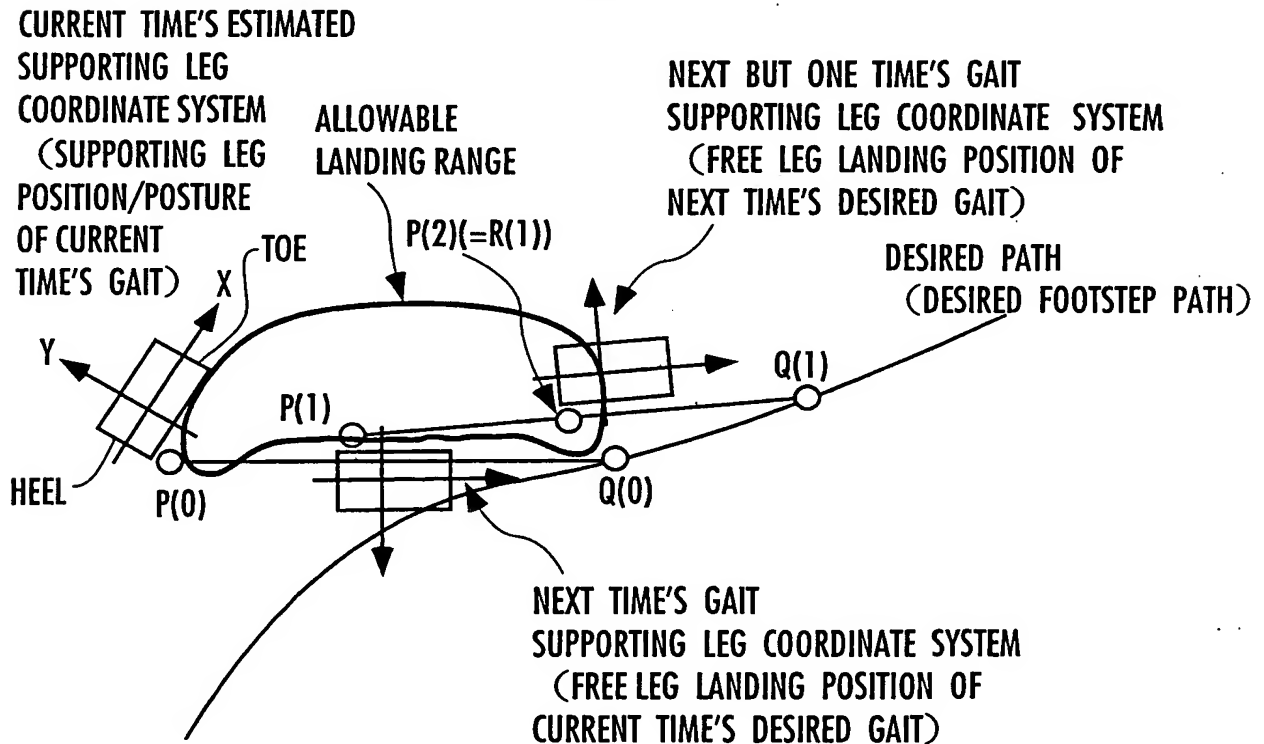

10/511360

15 / 32

FIG. 18


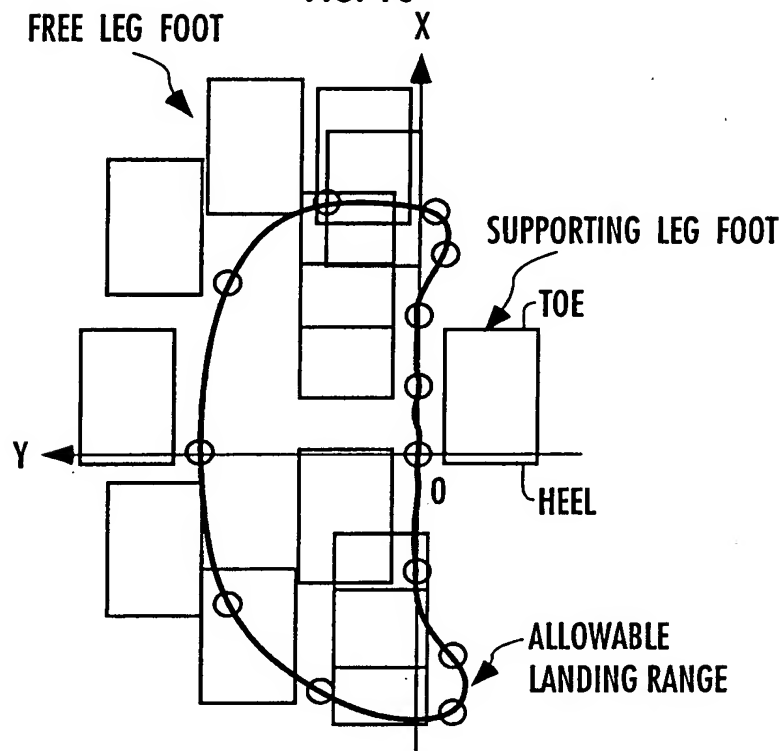


FIG. 19

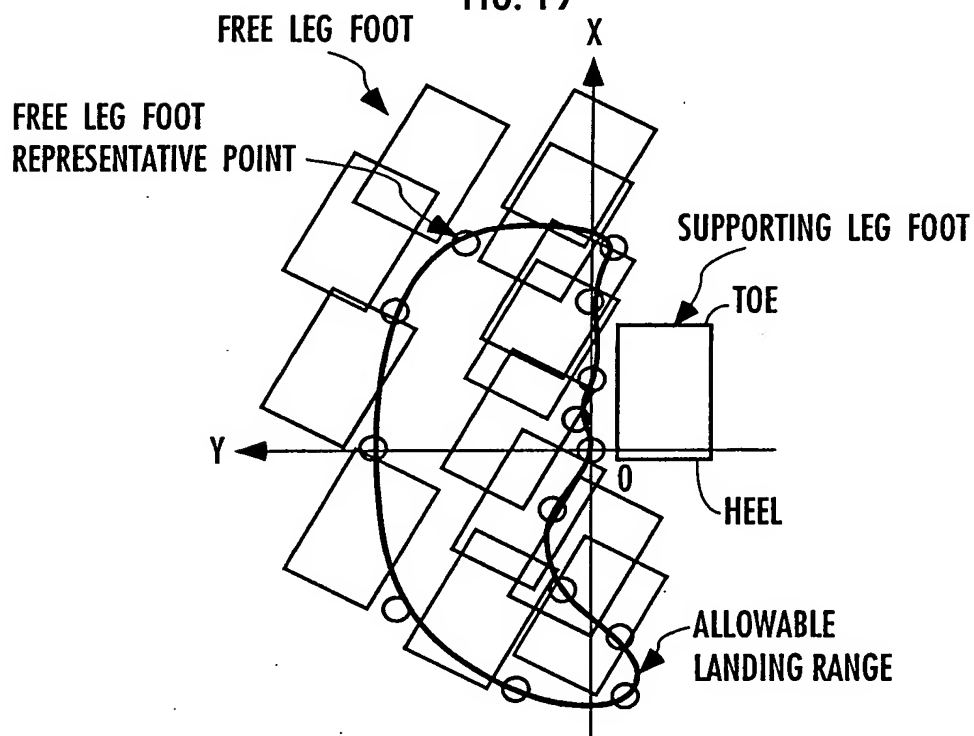

10/511360

16/32

FIG. 20

ENTRY

S3100

DETERMINE DEVIATION  $e$  BY WHICH DESIRED ZMP EXCEEDS ALLOWABLE RANGE

S3102

$$R(0) = K_a * e + R(0)$$

S3104

DETERMINE POINT CLOSEST TO REPRESENTATIVE CANDIDATE POINT  $R(0)$  IN  
 ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION  
 RANGE) , AS  $P(1)$

S3106

DETERMINE POSITION AND ORIENTATION OF NEXT TIME'S GAIT SUPPORTING LEG  
 COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT  
 TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(1)$  AND DIRECTION OF  
 X-AXIS OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  
 ORIENTATION OF LINE SEGMENT  $P(0)Q(0)$

S3108

DETERMINE NEXT TIME'S SHORT-TERM DESIRED POINT  $Q(1)$  BASED ON  
 REPRESENTATIVE POINT  $P(1)$  OF NEXT TIME'S GAIT SUPPORTING LEG  
 COORDINATE SYSTEM AND DESIRED PATH

S3110

DETERMINE REPRESENTATIVE CANDIDATE POINT  $R(1)$  OF NEXT BUT ONE TIME'S  
 GAIT SUPPORTING LEG COORDINATE SYSTEM ON LINE SEGMENT  $P(1)Q(1)$

S3112

DETERMINE POINT CLOSET TO REPRESENTATIVE CANDIDATE POINT  $R(1)$  IN  
 ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION  
 RANGE) , AS  $P(2)$

S3114

DETERMINE POSITION AND ORIENTATION OF NEXT BUT ONE TIME'S GAIT  
 SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE  
 POINT OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM  
 IS  $P(2)$  AND DIRECTION OF X-AXIS OF NEXT BUT ONE TIME'S GAIT  
 SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE SEGMENT  
 $P(1)Q(1)$

RETURN



10/511360

17/32

FIG. 21

ENTRY

S3200

DETERMINE CURVE THAT IS ASYMPTOTICALLY CLOSE TO DESIRED PATH BASED ON REPRESENTATIVE POINT  $P(0)$  OF ESTIMATED SUPPORTING LEG COORDINATE SYSTEM AND DESIRED PATH

S3202

DETERMINE REPRESENTATIVE CANDIDATE POINT  $R(0)$  OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM ON CURVE

S3204

DETERMINE POINT CLOSEST TO REPRESENTATIVE CANDIDATE POINT  $R(0)$  IN ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE) , AS  $P(1)$

S3206

DETERMINE POSITION AND ORIENTATION OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(1)$  AND DIRECTION OF X-AXIS OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE TANGENTIAL TO CURVE AT REPRESENTATIVE POINT  $P(1)$

S3208

DETERMINE REPRESENTATIVE CANDIDATE POINT  $R(1)$  OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM ON CURVE

S3210

DETERMINE POINT CLOSET TO REPRESENTATIVE CANDIDATE POINT  $R(1)$  IN ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE) , AS  $P(2)$

S3212

DETERMINE POSITION AND ORIENTATION OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(2)$  AND DIRECTION OF X-AXIS OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE TANGENTIAL TO CURVE AT REPRESENTATIVE POINT  $P(2)$


RETURN

10/511360

18 / 32


FIG. 22

CURRENT TIME'S ESTIMATED  
SUPPORTING LEG  
COORDINATE SYSTEM  
(SUPPORTING LEG  
POSITION/POSTURE  
OF CURRENT  
TIME'S GAIT)



ALLOWABLE  
LANDING  
RANGE

NEXT BUT ONE TIME'S GAIT  
SUPPORTING LEG COORDINATE SYSTEM  
(FREE LEG LANDING POSITION OF  
NEXT TIME'S DESIRED GAIT)




DESIRED PATH  
(DESIRED  
FOOTSTEP PATH)

NEXT TIME'S GAIT  
SUPPORTING LEG COORDINATE SYSTEM  
(FREE LEG LANDING POSITION OF  
CURRENT TIME'S DESIRED GAIT)


FIG. 23

CURRENT TIME'S ESTIMATED  
SUPPORTING LEG  
COORDINATE SYSTEM  
(SUPPORTING LEG  
POSITION/POSTURE  
OF CURRENT  
TIME'S GAIT)



ALLOWABLE  
LANDING  
RANGE

NEXT BUT ONE TIME'S GAIT  
SUPPORTING LEG COORDINATE SYSTEM  
(FREE LEG LANDING POSITION OF  
NEXT TIME'S DESIRED GAIT)



DESIRED PATH  
(DESIRED  
FOOTSTEP PATH)

NEXT TIME'S GAIT  
SUPPORTING LEG COORDINATE SYSTEM  
(FREE LEG LANDING POSITION OF  
CURRENT TIME'S DESIRED GAIT)

10/511360

19/32

FIG. 24

ENTRY

S3300

DETERMINE DEVIATION  $e$  BY WHICH DESIRED ZMP EXCEEDS ALLOWABLE RANGE

S3302

$$R(0) = K_a * e + R(0)$$

S3304

DETERMINE POINT CLOSEST TO REPRESENTATIVE CANDIDATE POINT  $R(0)$  IN ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE), AS  $P(1)$ 

S3306

DETERMINE POSITION AND ORIENTATION OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(1)$  AND DIRECTION OF X-AXIS OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE TANGENTIAL TO CURVE AT REPRESENTATIVE POINT  $P(1)$ 

S3308

DETERMINE REPRESENTATIVE CANDIDATE POINT  $R(1)$  OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM ON CURVE

S3110

DETERMINE POINT CLOSEST TO REPRESENTATIVE CANDIDATE POINT  $R(1)$  IN ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE), AS  $P(2)$ 

S3312

DETERMINE POSITION AND ORIENTATION OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(2)$  AND DIRECTION OF X-AXIS OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE TANGENTIAL TO CURVE AT REPRESENTATIVE POINT  $P(2)$ 

RETURN

10/511360

20/32

FIG. 25

ENTRY

S3400

DETERMINE CURRENT TIME'S SHORT-TERM DESIRED POINT  $Q(0)$  BASED ON REPRESENTATIVE POINT  $P(0)$  OF ESTIMATED SUPPORTING LEG COORDINATE SYSTEM AND DESIRED PATH

S3402

DETERMINE REPRESENTATIVE POINT  $P(1)$  OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM ON LINE SEGMENT  $P(0)Q(0)$  SO AS NOT TO EXCEED ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE)

S3404

DETERMINE POSITION AND ORIENTATION OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(1)$  AND DIRECTION OF X-AXIS OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE SEGMENT  $P(0)Q(0)$

S3406

DETERMINE NEXT TIME'S SHORT-TERM DESIRED POINT  $Q(1)$  BASED ON REPRESENTATIVE POINT  $P(1)$  OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM AND DESIRED PATH

S3408

DETERMINE REPRESENTATIVE POINT  $P(2)$  OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM ON LINE SEGMENT  $P(1)Q(1)$  SO AS NOT TO EXCEED ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE)

S3410

DETERMINE POSITION AND ORIENTATION OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(2)$  AND DIRECTION OF X-AXIS OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE SEGMENT  $P(1)Q(1)$

RETURN

10/511360

21 / 32

FIG. 26

CURRENT TIME'S ESTIMATED

SUPPORTING LEG

COORDINATE SYSTEM

(SUPPORTING LEG

POSITION/POSTURE

OF CURRENT

TIME'S GAIT)

NEXT BUT ONE TIME'S GAIT

SUPPORTING LEG COORDINATE SYSTEM


(FREE LEG LANDING POSITION OF

NEXT TIME'S DESIRED GAIT)

DESIRED PATH

(DESIRED

FOOTSTEP PATH)

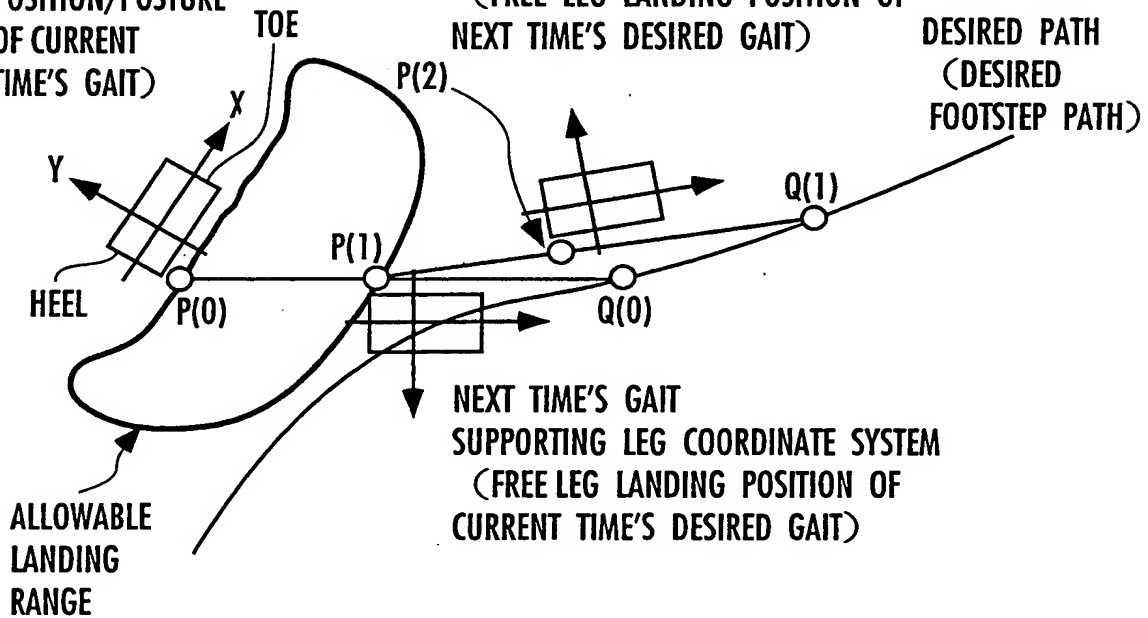

10/511360

22/32

FIG. 27

ENTRY

S3500

DETERMINE DEVIATION  $e$  BY WHICH DESIRED ZMP EXCEEDS ALLOWABLE RANGE

S3502

$$P(1) = K\alpha * e + P(1)$$

S3504

DETERMINE POSITION AND ORIENTATION OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(1)$  AND DIRECTION OF X-AXIS OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE SEGMENT  $P(0)Q(0)$

S3506

DETERMINE NEXT TIME'S SHORT-TERM DESIRED POINT  $Q(1)$  BASED ON REPRESENTATIVE POINT  $P(1)$  OF NEXT TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM AND DESIRED PATH

S3508

DETERMINE REPRESENTATIVE POINT  $P(2)$  OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM ON LINE SEGMENT  $P(1)Q(1)$  SO AS NOT TO EXCEED ALLOWABLE LANDING RANGE (SELF-DEPENDENT ALLOWABLE LANDING POSITION RANGE)

S3510

DETERMINE POSITION AND ORIENTATION OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM SO THAT POSITION OF REPRESENTATIVE POINT OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS  $P(2)$  AND DIRECTION OF X-AXIS OF NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM IS ORIENTATION OF LINE SEGMENT  $P(1)Q(1)$

RETURN

10/511360

23/32

FIG. 28

ENTRY

S3600

SET FIRST TURNING GAIT DETERMINED IN LAST CONTROL PERIOD AS  
CURRENT TIME'S GAIT, AND SECOND TURNING GAIT AS NEXT TIME'S GAIT

S3602

CALCULATE PREDICTED NEXT TIME'S LANDING POSITION/POSTURE AND  
PREDICTED NEXT BUT ONE TIME'S LANDING POSITION/POSTURE BASED ON  
ESTIMATED SUPPORTING LEG COORDINATE SYSTEM, AND CURRENT TIME'S  
DESIRED GAIT AND NEXT TIME'S DESIRED GAIT

S3604

CALCULATE PREDICTED NEXT TIME'S LANDING POSITION DEVIATION AND  
PREDICTED NEXT TIME'S LANDING ORIENTATION DEVIATION, WHICH ARE  
POSITIONAL DEVIATION AND ORIENTATIONAL DEVIATION FROM DESIRED  
PATH OF PREDICTED NEXT TIME'S LANDING POSITION/POSTURE

S3606

CALCULATE PREDICTED NEXT BUT ONE TIME'S LANDING POSITION  
DEVIATION AND PREDICTED NEXT BUT ONE TIME'S LANDING ORIENTATION  
DEVIATION, WHICH ARE POSITIONAL DEVIATION AND ORIENTATIONAL  
DEVIATION FROM PATH OF PREDICTED NEXT BUT ONE TIME'S LANDING  
POSITION/POSTURE

S3608


CORRECT POSITION AND ORIENTATION OF NEXT TIME'S GAIT SUPPORTING  
LEG COORDINATE SYSTEM AND POSITION AND ORIENTATION OF  
NEXT BUT ONE TIME'S GAIT SUPPORTING LEG COORDINATE SYSTEM  
BASED ON ABOVE DEVIATION

RETURN

10/511360

24 / 32

FIG. 29

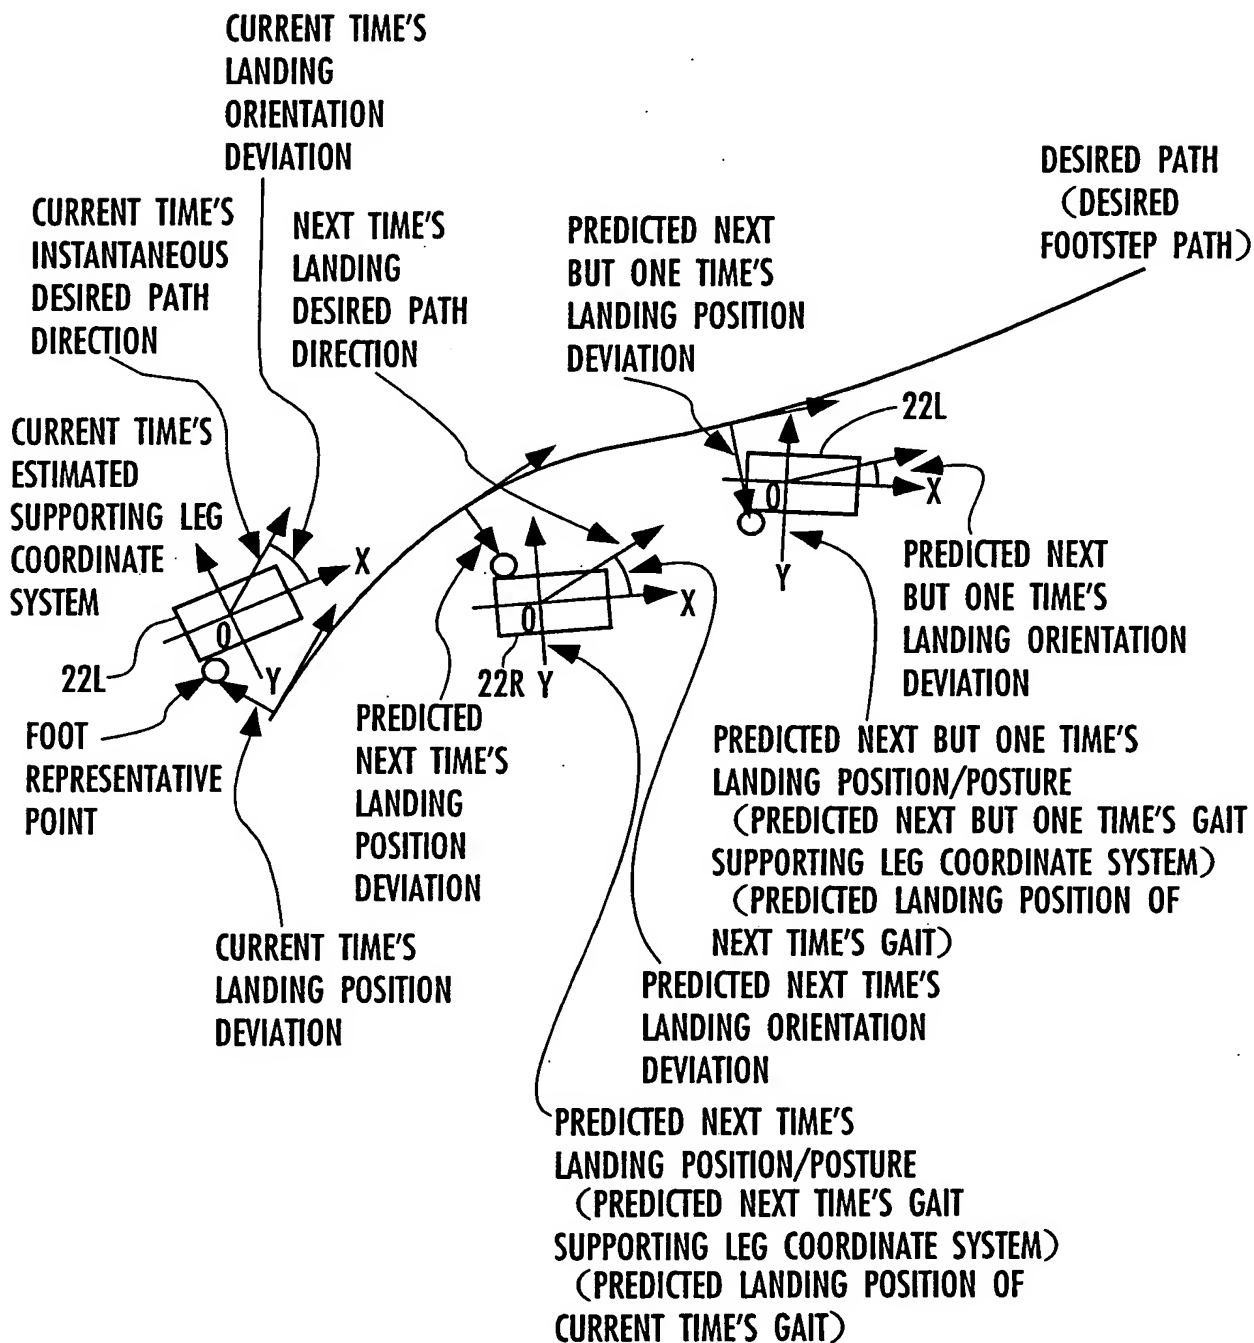




10/511360

25/32


FIG. 30

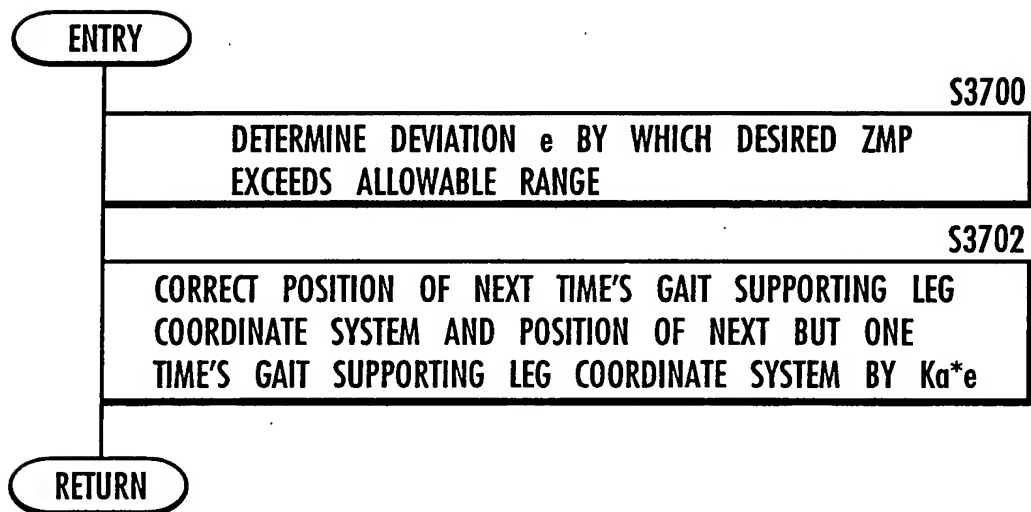

10/511360

26/32


FIG. 31

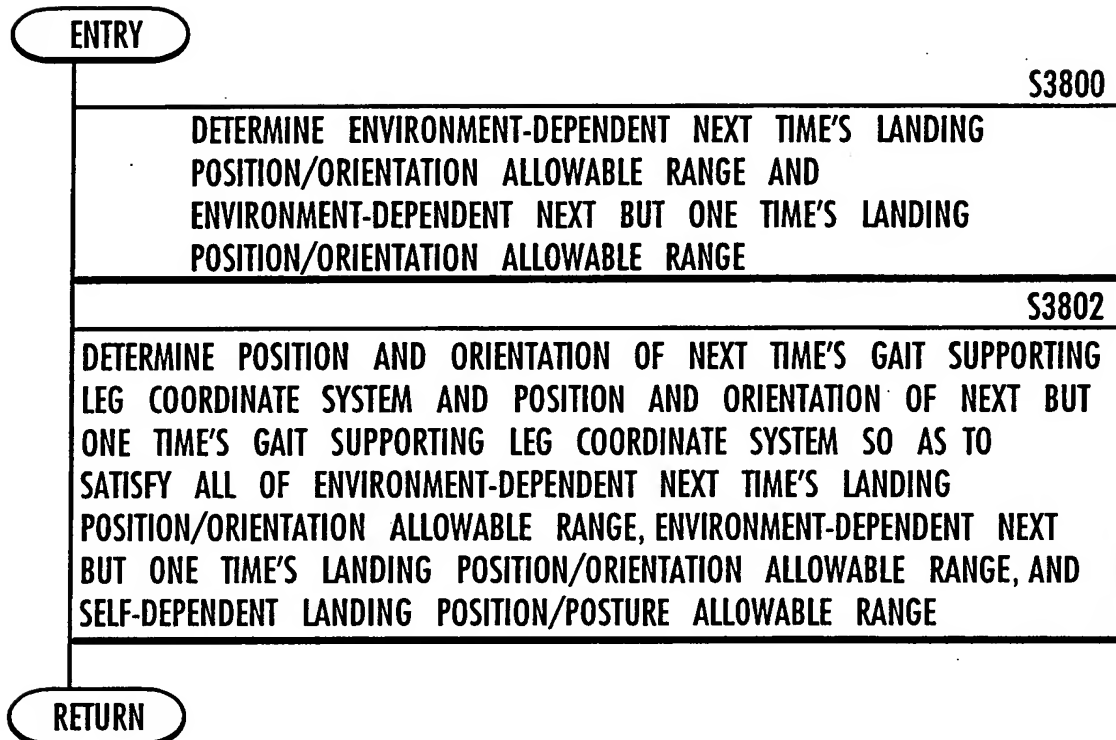

10/511360

27 / 32


FIG. 32

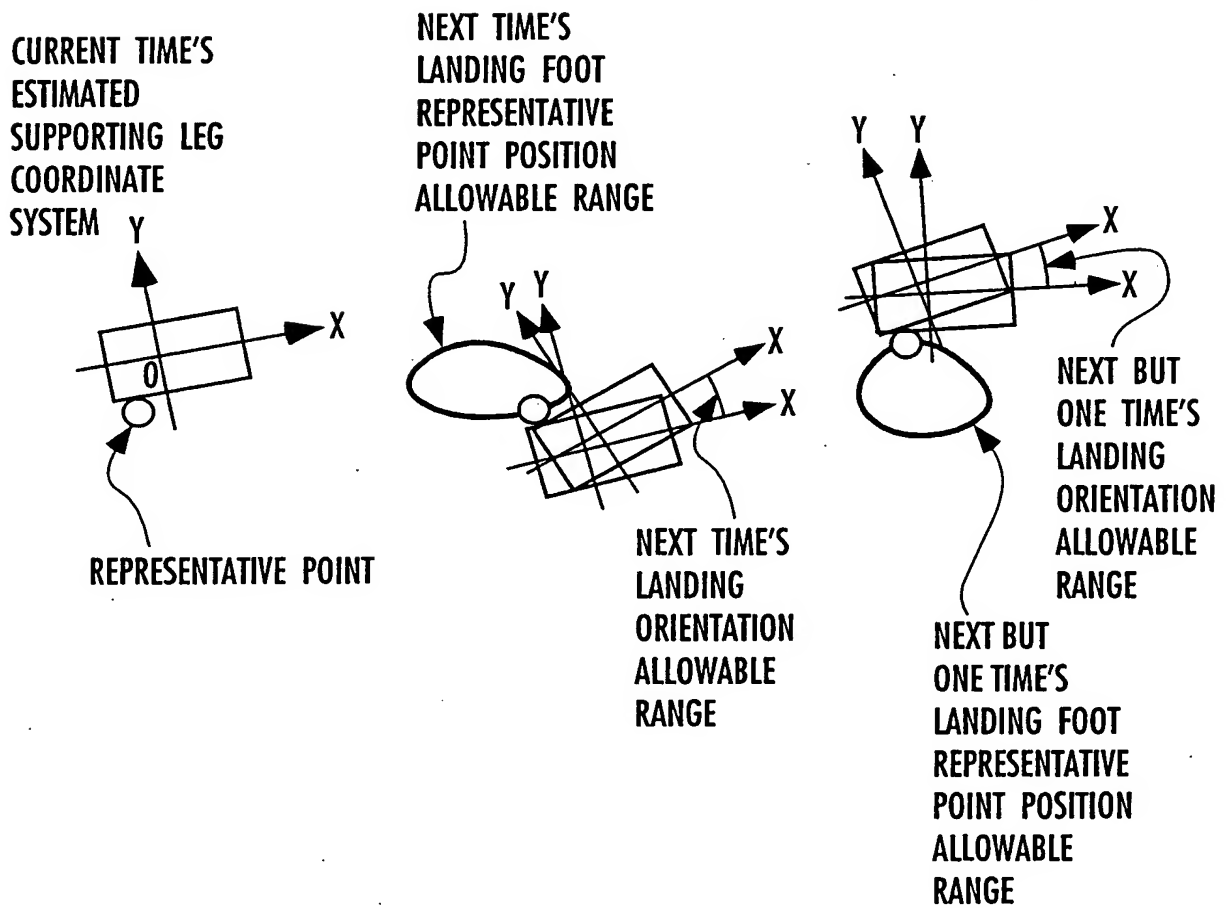

10/511360


28/32

FIG. 33

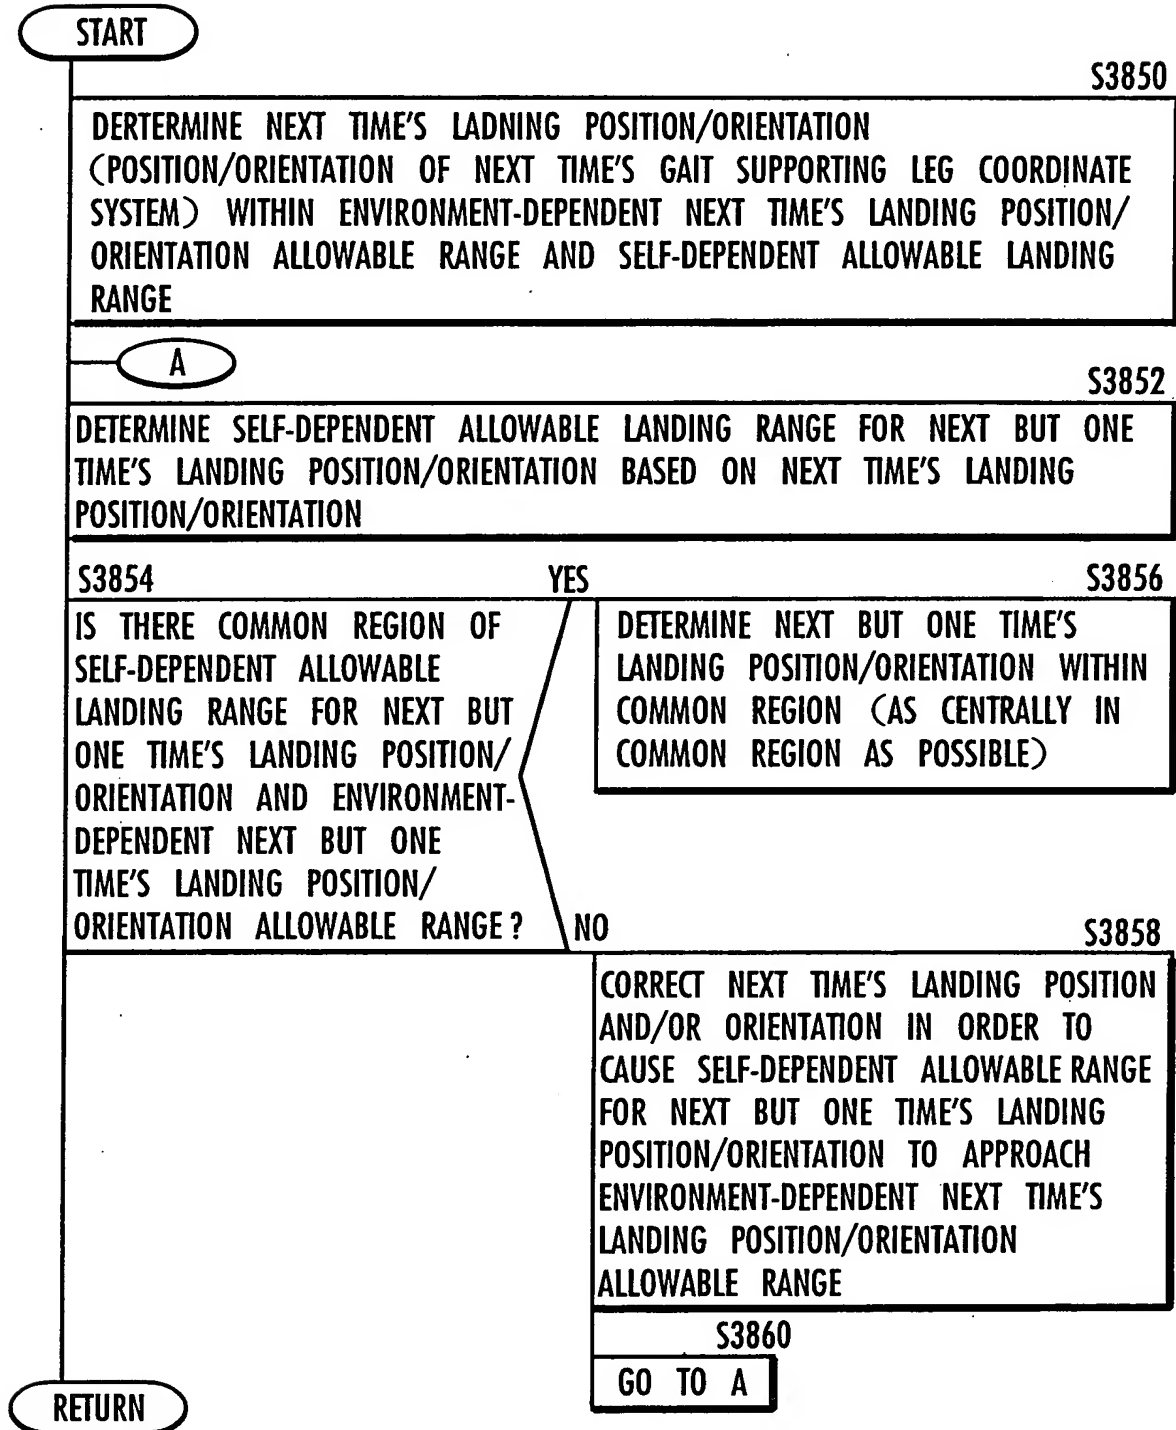

29 / 32


FIG. 34

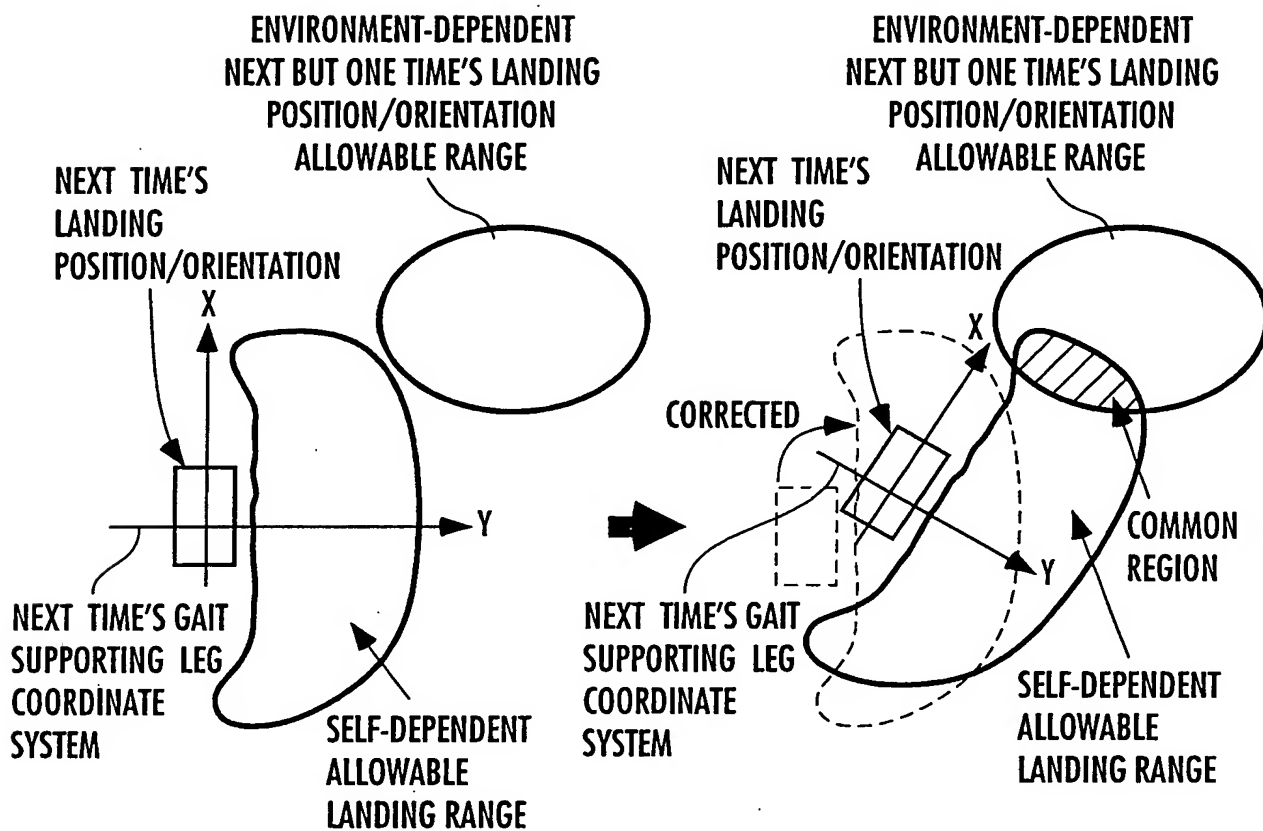

10/511360

30/32


FIG. 35

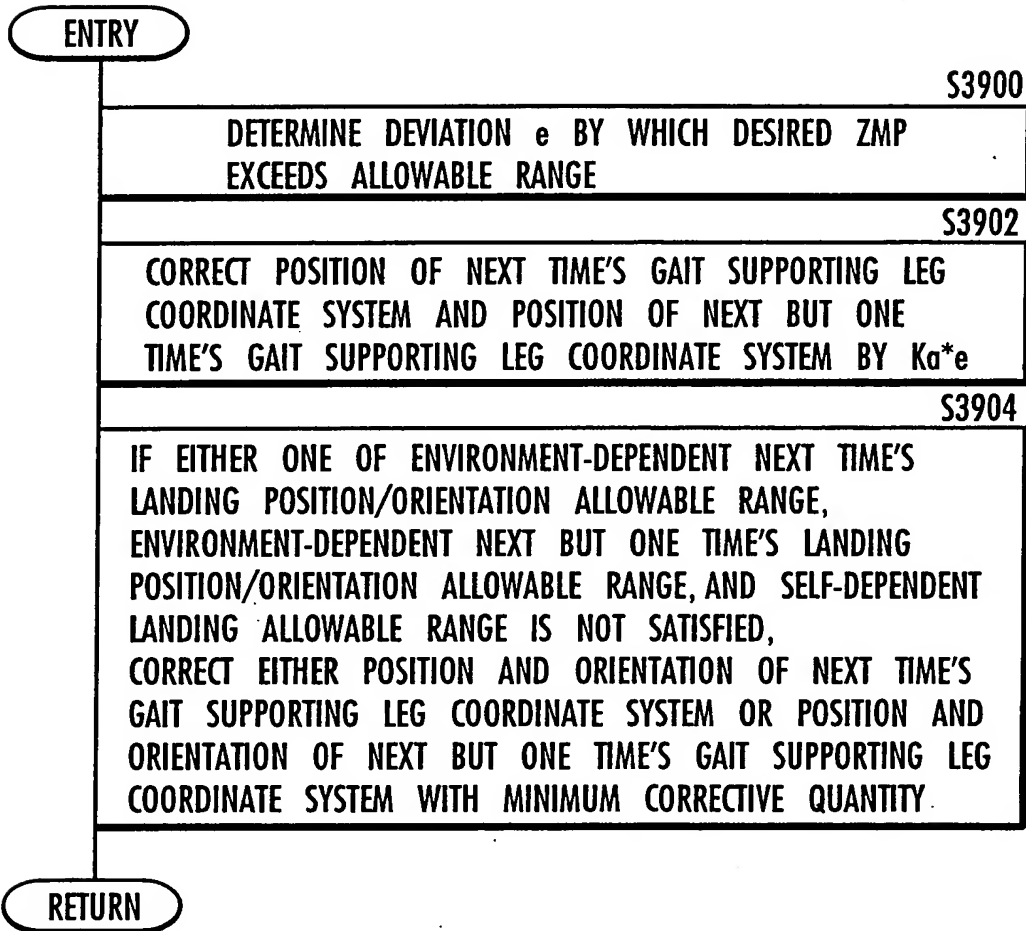

10/511360

31/32

FIG. 36

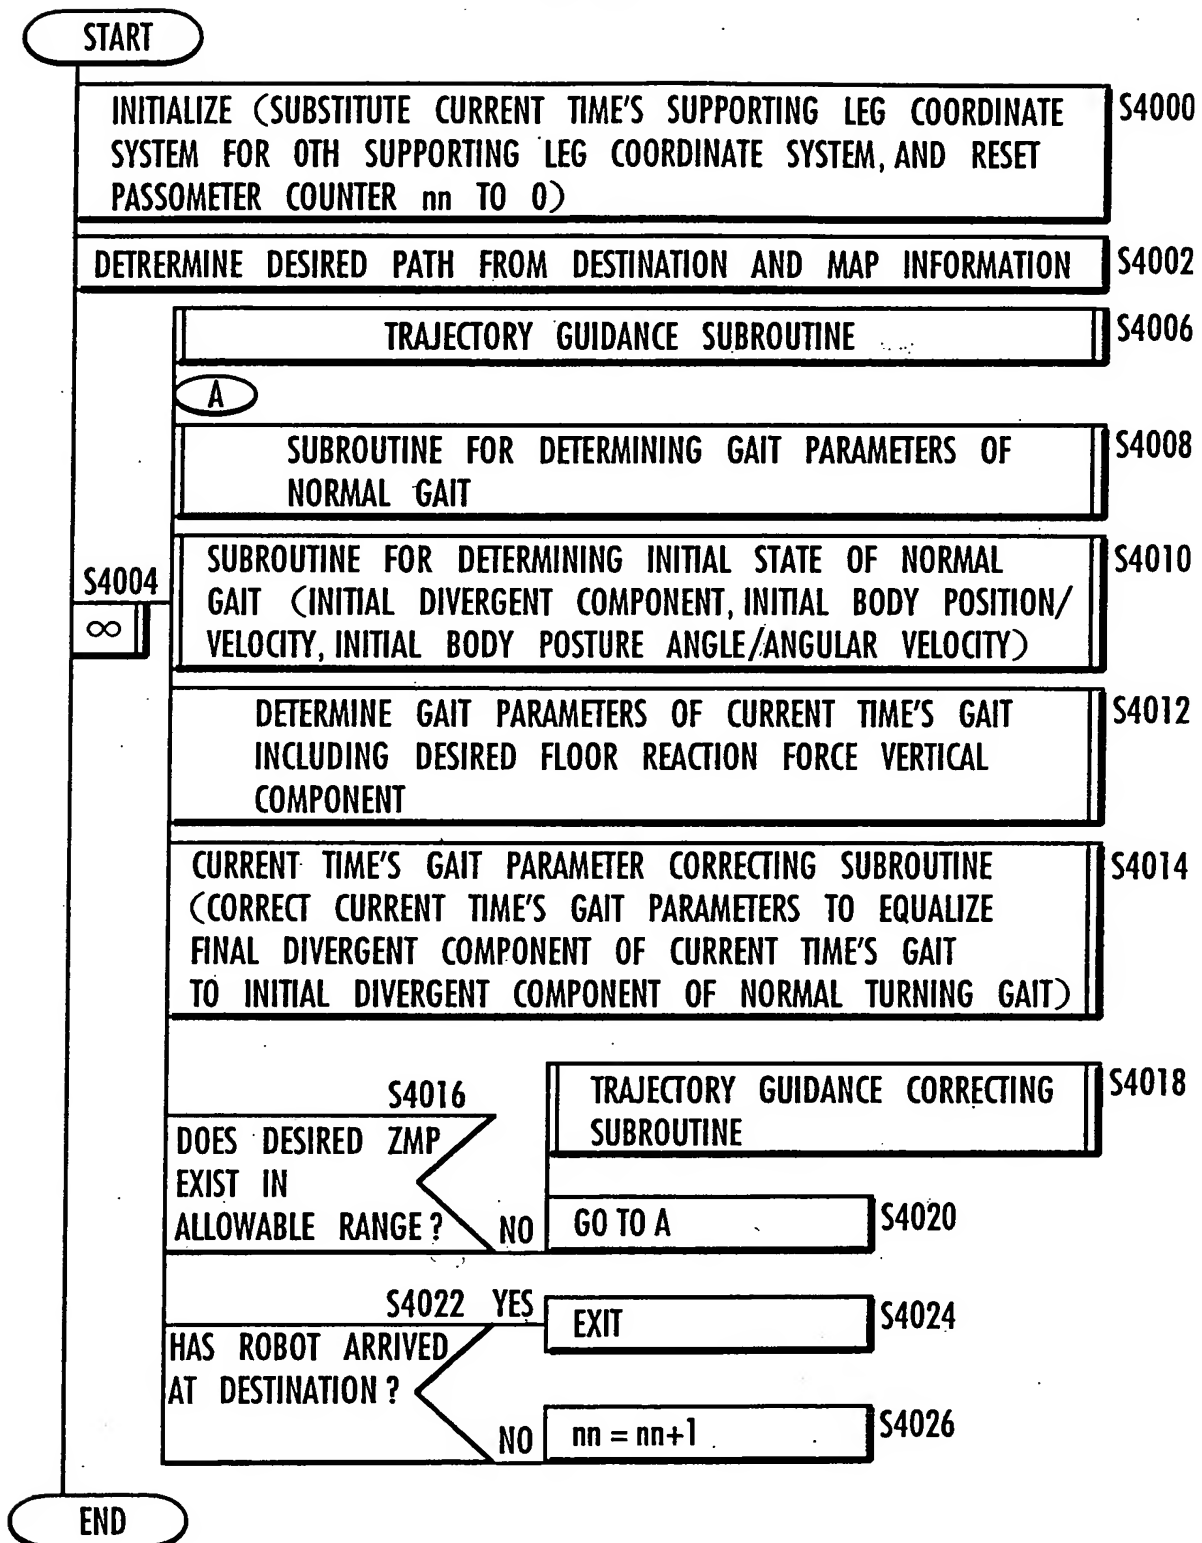

10/511360

32 / 32

FIG. 37

